

Tripod Turnstile Gate

TWLD-TW2700

Semi-Automatic Tripod Turnstile ensures smooth and easy passage with minimal passing resistance. It offers versatile working modes, including One-Way Traffic and Two-Way Traffic operation, all configurable through buttons on the main control board.

In case of a power outage, the arms automatically drop for unimpeded access. Additionally, the turnstile features obstacle detection with automatic stopping for enhanced safety. It can also be seamlessly integrated with facial recognition, fingerprint, biometric, and other contactless systems for a no-touch user experience.


Features



Life Time No Maintenance



SS304



Failure proof
Electromagnetic
Solenoid valves



≤5 million
times



No attrition &
High Temperature
Resistant




Low Noise
& High
Intelligence

Technical Specification

Integration	Face, Finger, Card, PIN & QR
Housing Material	SS304, Acrylic
Passage Width	500 mm
Dimension	510(L) × 310(W) × 1010(H) mm
Traffic Direction	Bi-Directional
Flow Rate	25–30 People/min (Normally Open Mode) 15–20 People/min (Normally Closed Mode)
Opening Signal	Dry Contact Signal
Lifetime	≤ 5 Million Cycles
Power Consumption	30–60 W
Operating Temperature	-20°C to +75°C

Dimension Drawing

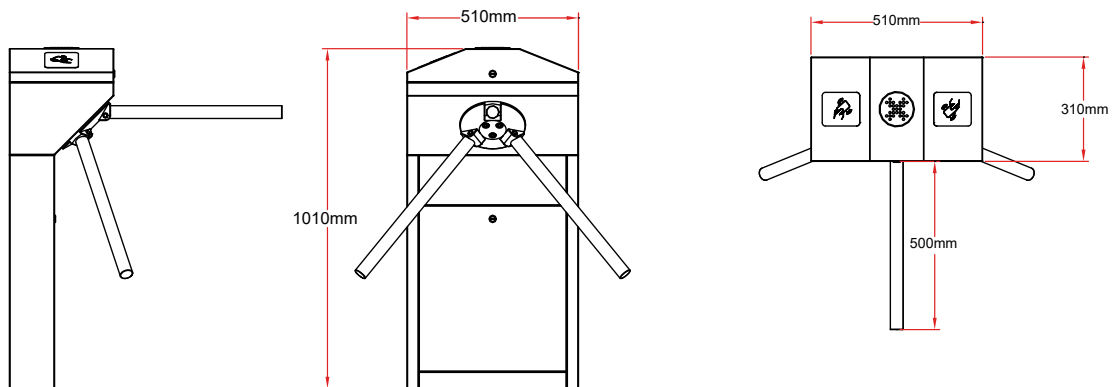

Application



Airport



Railways



Defense



Education



Hospital



Government



Office



Bank



Retail

Disclaimer : All pictures shown are for illustration purposes only. The actual product and color may vary due to product enhancement. The brief specification is mentioned and may change without prior notice. Please consult us before placing any order.