



TWLD-SG2600 / TWLD-SG2602 Civil Diagram

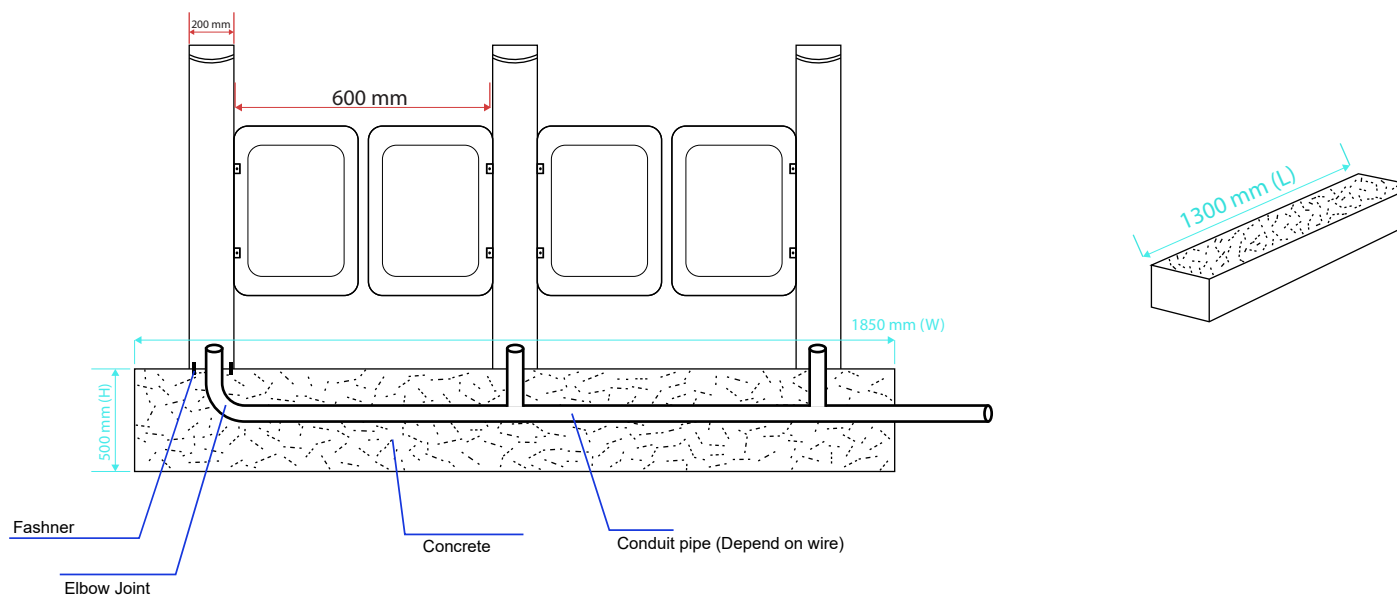

TWLD-SG2600 / TWLD-SG2602 Connection Diagram

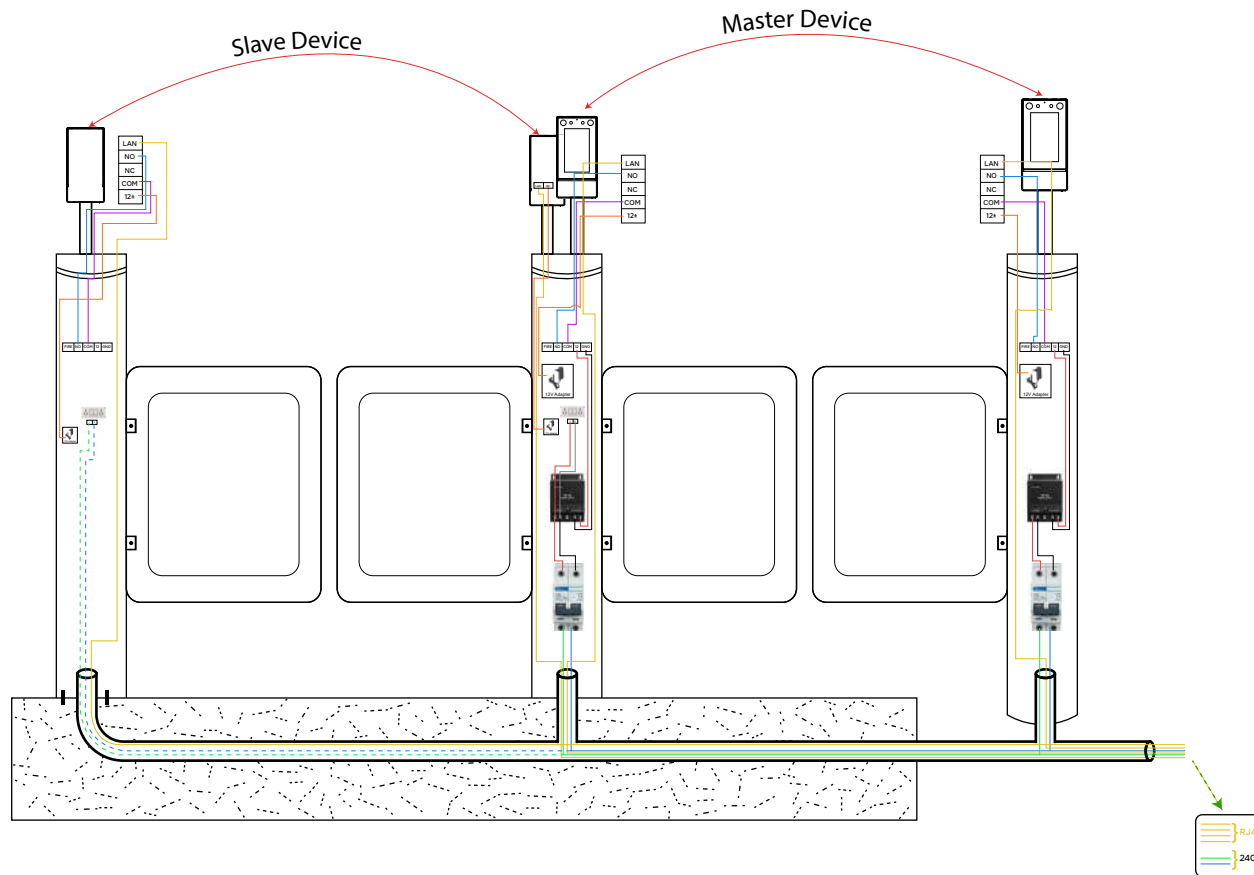

Note:

- If multiple devices are installed, each device must have a separate RJ45 cable.
- The RJ45 cable is required only when a face biometric device is installed.
- If a reader is used instead of a device, a 6-pair, 0.5 mm cable will be required.
- Communication wire Master to Slave